

# CAMSO ADT 753R

FORMERLY SOLIDEAL SRAT



ARTICULATED  
DUMP TRUCK



## RADIAL PERFORMANCE MEETS HIGH TRACTION

A premium and versatile solution for tough articulated dump truck applications. Combining excellent traction, stability and durability, it's an excellent solution for a wide variety of surface conditions.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



## CAMSO ADT 753R

NON-DIRECTIONAL TREAD PATTERN  
WITH OPTIMIZED LUG-TO-VOID RATIO

- Increases traction and durability in off-road conditions

## DEEP TREAD DEPTH

- Enhances traction in off-road conditions



## HEAVY-DUTY DUAL-STAR CARCASS


- Optimizes stability for articulated dump truck applications

## PREMIUM RUBBER COMPOUNDS

- Reduces heat build-up

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			APPLICATION	SI	LI	INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb]											
			O.D. [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]				KPa	200	250	300	350	400	450	500	550	600	650	
			PSI	29	36				44	51	58	65	73	80	87	94				
20.5R25	TBLS	17.00/2.0	1485	524	31	Loader*/**	A2	186/193	kg	4750	5600	6300	7100	8000	8750	9500*	10000	10900	11500*	
									lb	10500	12300	13900	15700	17600	19300	20900*	22000	24000	25400*	
			58.46	20.63	39.1	EM*/**	B	168/177	kg	-	-	4750	5300	5800	6500	6900	7300 (5.25)**	-	-	
									lb	-	-	10500	11700	12800	14300	15200	16100 (76)**	-	-	
						Grader*/**	A8	161/170	kg	3450	4125	4625*	-	-	-	-	-	-	-	-
									lb	7600	9100	10200**	-	-	-	-	-	-	-	-
23.5R25	TBLS	19.50/2.5	1615	614	29	Loader*/**	A2	195/201	kg	6000	7100	8250	9250	10300	11200	12150*	12850	13600	14500*	
									lb	13200	15700	18200	20400	22700	24700	26800*	28300	30000	32000*	
			63.58	24.17	36.5	EM*/**	B	176/185	kg	-	-	6000	6700	7500	8250	9000	9250 (5.25)**	-	-	
									lb	-	-	13200	14800	16500	18200	19800	20400 (76)**	-	-	
						Grader*/**	A8	161/170	kg	4500	5300	6000*	-	-	-	-	-	-	-	
									lb	9900	11700	13200*	-	-	-	-	-	-	-	
26.5R25	TBLS	22.00/3.0	1736	688	37	Loader*/**	A2	202/209	kg	7500	9000	10300	11500	12850	14000	15000*	16000	17000	18500*	
								lb	16500	19800	22700	25400	28300	30900	33100*	35300	37500	40800*		
			68.35	27.09	46.6	EM*/**	B	184/193	kg	-	-	7500	8500	9500	10300	11200	11500 (5.25)**	-	-	
								lb	-	-	16500	18700	20900	22700	24700	25400 (76)**	-	-		
29.5R25	TBLS	25.00/3.5	1871	777	38	Loader*/**	A2	208/216	kg	-	-	-	-	15500	17000	18000*	19500	20600	22400*	
								lb	-	-	-	-	34200	37500	39700*	43000	45400	49400*		
			73.66	30.59	47.9	EM*/**	B	191/200	kg	-	-	9250	10300	11500	12500	13600	14000 (5.25)**	-	-	
								lb	-	-	20400	22700	25400	27600	30000	30900 (76)**	-	-		

## LUG-TO-VOID RATIO

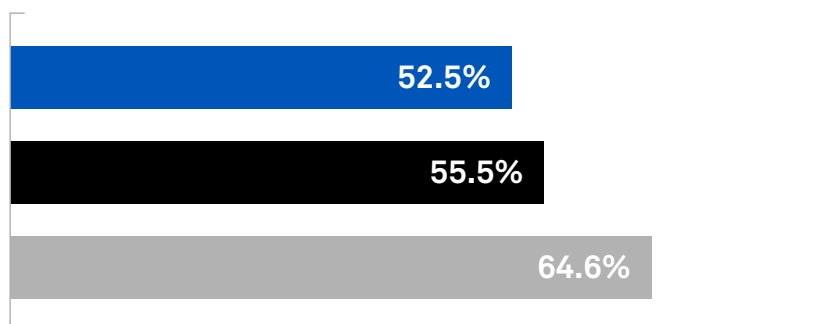

- CAMSO ADT 753R
- CAMSO WHL 753R NEW
- CAMSO WHL 753R 25% WORN

The Camso ADT 753R optimized lug-to-void ratio provides enhanced traction while its premium compounds and E3 depth minimizes heat build-up.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)

