

CAMSO WL



WHEEL
EXCAVATORS



HIGH PERFORMANCE, MAXIMUM PROTECTION

Optimizes performance and durability for wheel excavators. Provides the best stability, side impact protection and cut resistance for heavy-duty applications.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



ROAD
FREE
COMPANY

CAMSO WL



HEAVY-DUTY CARCASS

- Provides best stability and side impact resistance

PREMIUM RUBBER COMPOUNDS

Provides best durability and cut resistance



LARGE CASING DESIGN


Improves ride quality and stability

EXTRA-DEEP LUG DEPTH

- Provides best durability and traction

| TIRE SIZE | PR | TT / TBLS | RIM SIZE | | ACTUAL TIRE DIMENSIONS | | | LOAD INDEX | SPEED SYMBOL | MAXIMUM TIRE LOAD [kg] [lb] | | | | | |
|-----------|----|--------------|-------------|-------------|---------------------------|----------------------|--------------------------|---------------|-----------------|--------------------------------|----------|---------------------|-------------------|-------------------|-------------------|
| | | | Recommended | Alternative | O.D. [mm] [in] | O.W. [mm] [in] | O.T.D. [mm] [32nd] | | | All surfaces | | | Improved surfaces | | |
| | | | | | | | | | | Static | Creep | 0-8 km/h 0-5 mph | 10 km/h 6 mph | 25 km/h 16 mph | 45 km/h 28 mph |
| 8.25-20 | 14 | TT | 6.50 | 7.00 | 1000 | 252 | 26 | 148 | A2 | 6105 | 5120 | 3645 | 3150 | 2600 | 2325 |
| | | | | | 39.4 | 9.9 | 33 | | | 13500 | 11300 | 8050 | 6950 | 5750 | 5150 |
| | | | | | 1000 | 252 | 26 | | | 9.00 bar | 9.00 bar | 8.00 bar | 8.00 bar | 7.50 bar | 7.50 bar |
| | | | | | 39.4 | 9.9 | 33 | | | 129 PSI | 129 PSI | 114 PSI | 114 PSI | 107 PSI | 107 PSI |
| 9.00-20 | 14 | TT | 7.00 | 6.50/7.50 | 1039 | 267 | 27 | 153 | A2 | 6990 | 5860 | 4170 | 3605 | 2975 | 2660 |
| | | | | | 40.9 | 10.5 | 34 | | | 15450 | 12950 | 9200 | 7950 | 6550 | 5850 |
| | | | | | 1039 | 267 | 27 | | | 8.50 bar | 8.50 bar | 7.50 bar | 7.50 bar | 7.00 bar | 7.00 bar |
| | | | | | 40.9 | 10.5 | 34 | | | 121 PSI | 121 PSI | 107 PSI | 107 PSI | 100 PSI | 100 PSI |
| 10.00-20 | 16 | TT | 7.50 | 7.00/8.00 | 1070 | 284 | 26 | 158 | A2 | 8215 | 6890 | 4900 | 4240 | 3500 | 3125 |
| | | | | | 42.1 | 11.2 | 33 | | | 18150 | 15200 | 10800 | 9350 | 7750 | 6900 |
| | | | | | 1070 | 284 | 26 | | | 8.50 bar | 8.50 bar | 8.00 bar | 8.00 bar | 7.50 bar | 7.50 bar |
| | | | | | 42.1 | 11.2 | 33 | | | 121 PSI | 121 PSI | 114 PSI | 114 PSI | 107 PSI | 107 PSI |
| 11.00-20 | 16 | TT | 8.00 | 8.50 | 1064 | 280 | 22 | 160 | A2 | 8700 | 7300 | 5200 | 4500 | 3700 | 3300 |
| | | | | | 41.9 | 11.0 | 28 | | | 19200 | 16100 | 11500 | 9950 | 8150 | 7300 |
| | | | | | 1064 | 280 | 22 | | | 8.50 bar | 8.50 bar | 7.75 bar | 7.75 bar | 7.00 bar | 7.00 bar |
| | | | | | 41.9 | 11.0 | 28 | | | 121 PSI | 121 PSI | 111 PSI | 111 PSI | 100 PSI | 100 PSI |

COMPARISON OF 10.00-20 TIRES

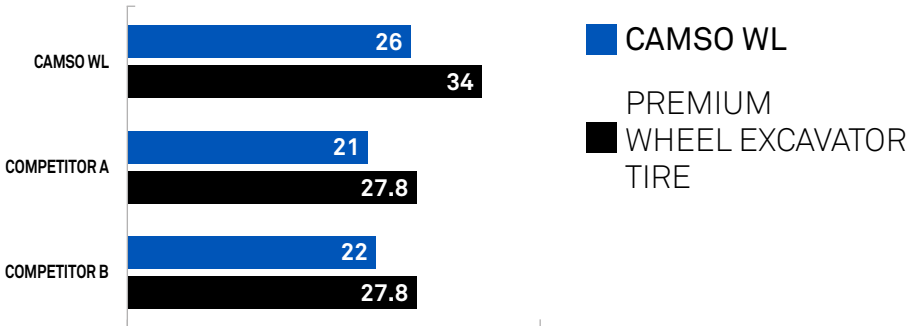

TREAD ASPECTS



camso.co

AUTHORIZED DISTRIBUTOR:

