

# CAMSO LM L3



WHEEL LOADERS



## MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO LM L3



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction




NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	PR	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	MAXIMUM TIRE LOAD [kg] VERSUS INFLATION PRESSURE [bar]											
								2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	
		O.D [mm]	O.W [mm]	O.T.D [mm]															
15.5-25	12	1283	417	26	168	A2	L-3	4250	4475	4675	4875	5100	5350	5600	-	-	-	-	
					149	B	E-3	3250	-	-	-	-	-	-	-	-	-	-	-
					142	A8	G-3	-	-	-	-	-	-	-	-	-	-	-	-
15.5-25	16	1285	407	26	175	A2	L-3	4250	4475	4675	4875	5100	5350	5600	5800	6000	6150	6400	
					156	B	E-3	3250	3650	4000	-	-	-	-	-	-	-	-	-
					146	A8	G-3	2800	3000	-	-	-	-	-	-	-	-	-	-
17.5-25	12	1380	467	26	171	A2	L-3	5050	5350	5600	5900	6150	-	-	-	-	-		
					153	B	E-3	-	-	-	-	-	-	-	-	-	-	-	-
					145	A8	G-3	-	-	-	-	-	-	-	-	-	-	-	-
17.5-25	16	1391	460	26	177	A2	L-3	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	-	
					158	B	E-3	3850	4050	4250	-	-	-	-	-	-	-	-	-
					150	A8	G-3	3100	3350	-	-	-	-	-	-	-	-	-	-
17.5-25	20	1363	477	28	181	A2	L-3	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	7500	
					164	B	E-3	3850	4050	4250	4450	4650	4850	5000	-	-	-	-	-
					181	A2	L-3	6700	7100	7500	7900	8250	-	-	-	-	-	-	-
20.5-25	16	1503	545	32	167	B	E-3	5150	5450	-	-	-	-	-	-	-	-	-	
					156	A8	G-3	-	-	-	-	-	-	-	-	-	-	-	-
					186	A2	L-3	6700	7100	7500	7900	8250	8550	8875	9200	9500	-	-	-
20.5-25	20	1512	552	30	170	B	E-3	5150	5450	5750	6000	-	-	-	-	-	-	-	
					191	A2	L-3	8500	9000	9500	10000	10400	10900	-	-	-	-	-	-
					177	B	E-3	6550	6950	7300	-	-	-	-	-	-	-	-	-
23.5-25	24	1630	630	37	196	A2	L-3	8500	9000	9500	10000	10400	10900	11300	11700	12100	12500	-	
					180	B	E-3	6550	6950	7300	7650	8000	-	-	-	-	-	-	-
					198	A2	L-3	11000	11500	12050	12650	13200	-	-	-	-	-	-	-
26.5-25	20	1752	691	40	181	B	E-3	8250	-	-	-	-	-	-	-	-	-	-	
					203	A2	L-3	11000	11500	12050	12650	13200	13600	14000	14500	15000	15500	-	-
					188	B	E-3	8250	8750	9250	9650	10000	-	-	-	-	-	-	-
29.5-25	28	1873	770	36	207	A2	L-3	12850	13600	14000	15000	15500	16000	17000	17500	-	-	-	
					193	B	E-3	10000	10300	10900	11500	-	-	-	-	-	-	-	-

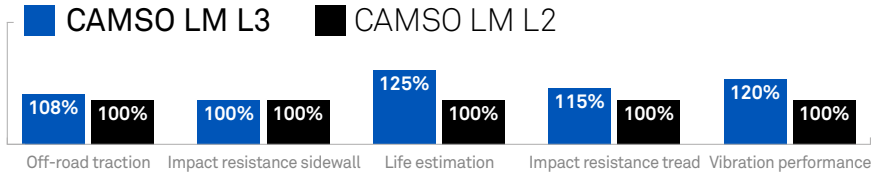

Durability and stability are key issues for loader applications on mixed and hard surfaces. Camso LM L3 enhances tread life and impact resistance with a high lug-to-void ratio and engineered non-directional tread pattern. Additionally, a heavy-duty carcass improves stability.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL